

JSW Pragati+

Al-Zn Colour Coated Sheets



MAKE A
STRONGER
CHOICE!

Key Product Features



Aluminium
Zinc coating



All Weather
Protection



Superior
Strength



Wide Range
Of Colours



ABOUT JSWSCPL

JSW Steel Coated Products Limited (JSWSCPL) is a 100% subsidiary of JSW Steel, one of India's biggest Steel producers and the flagship company of JSW Group. Ranked among India's top business houses, JSW's innovative and sustainable ideas cater to the core sectors of Steel, Energy, Cement & Infrastructure. With a continuous strive for excellence with its strength, differentiated product mix, state-of-the-art technology, excellence in execution and focus on sustainability, we indeed drive change.

ABOUT JSW PRAGATI+

JSW Pragati+ is a high-quality, Aluminium-Zinc alloy coated, pre-painted roofing sheet with anti-corrosion technology that comes in a vibrant range of colours and designs. The latest colour coating technology at JSW, ensures constant colour coating thickness and enhanced life of JSW Pragati+ roofing sheets.

JSW Pragati+ offers the strength of steel, enhanced corrosion resistance, the aesthetic appeal of paint, and protection against all weather.


KEY PRODUCT FEATURES



Anti-
Corrosion




Superior
Strength




All Weather
Protection



Wide Range
Of Colours



Aluminium
Zinc coating

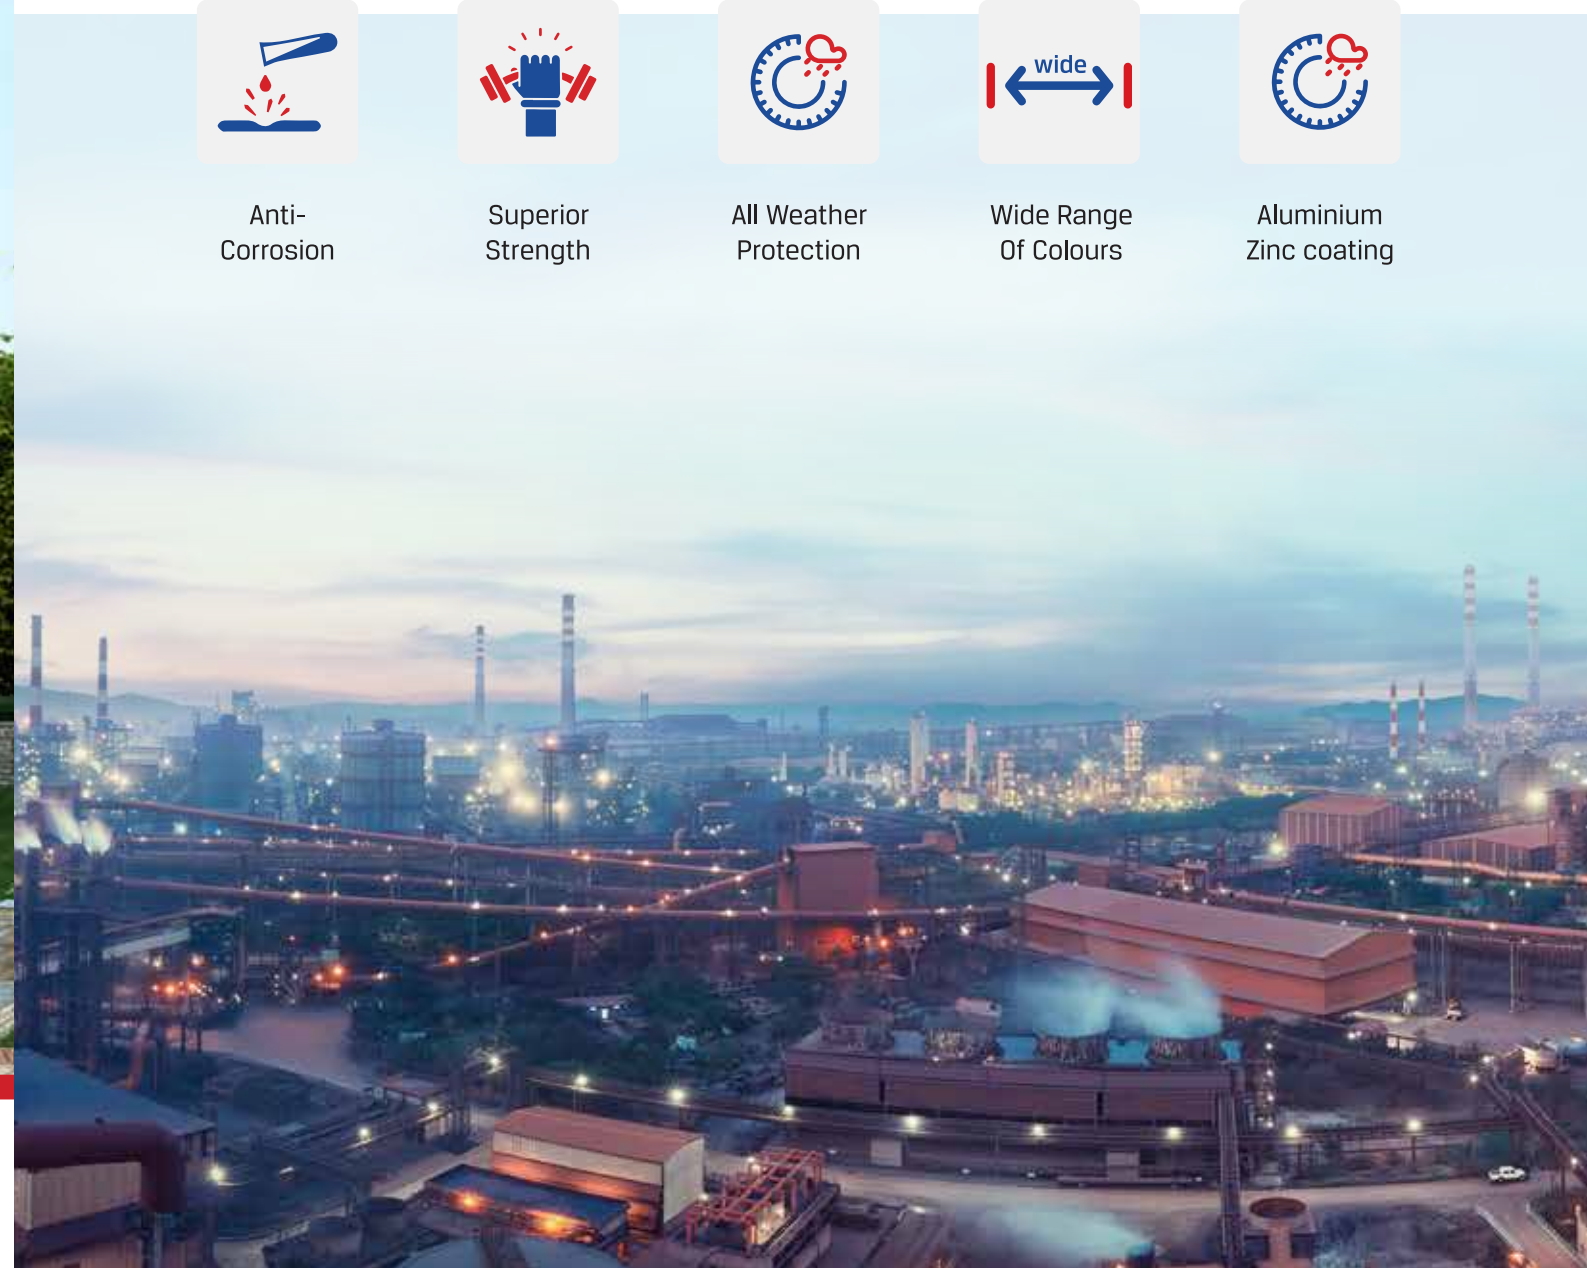

MARK OF INGENUITY

Non-erasable liner marking

JSW PRAGATI+ X,XX MM AZ70 [ISI] 15965 BIS APPROVED P DD/MM/YYYY

All genuine JSW Pragati+ sheets come with special non-erasable liner marking to ensure that you get the original high quality products.

BIS approved



JSW Pragati+ sheets come with correct thickness and optimum weight.

EXTENSIVE RANGE OF COLOURS






SPECIFICATIONS

Thickness Range	0.25 -1.5mm
Width Range	Upto 1440mm
Length (Mm) For	Upto 12000 mm (39 Feet)
Profile Types	Trapezoidal, Single Ribbed, Double Ribbed Mangalore Tiles, Corrugated

INSTALLATIONS

PLACEMENT OF GROOVE PORTION

- Right Way**
 The groove portion should be on the inner side. The air gap on the left ensures that water does not travel upwards.
- Wrong way**
 The groove portion should not be on the outer side. Improper contact makes the roof vulnerable to water leakages.



Proper fastener installation procedures to be followed

1. Do not leave metal fillings, debris on the sheets or it can form red rust causing discoloration on the surface of the panel.
2. Do not install the roof sheets during rains as sheets get wet and slippery and can cause damage to the sheets.
3. Accelerated corrosion can occur due to lime contained in the cement.
4. Do not allow direct contact with cement or cement foundation.



Storage and Handling : Store Colour Coated sheets in dry and well ventilated conditions. Water (including condensation) trapped between the sheets may damage the coating beyond repair.

- DO'S**
1. Always keep the material in a dry, shaded and good ventilated area.
 2. If not required for immediate use, provide cover to protect the material.
 3. If the sheets become wet during storage, separate them without delay. Clean the moisture on the surface with a clean cloth. Stack the sheets with gaps between them for air circulation.
 4. Always keep the material slightly above the ground by using wooden or rubber plank.
- DONT'S**
1. Do not keep the material on wet floor (water, rain, etc.).
 2. Metal-on-metal contact and sliding sheet on rough surface should be avoided whenever possible.
 3. Do not let the sheets come in contact with salt, water, corrosive chemicals, ash, fumes, foundries, plating works, kilns, fertilizers and wet or green lumber.