सत्यमेव जयते

File No: SIA/MH/IND1/495080/2024

Government of India

Ministry of Environment, Forest and Climate Change

(Issued by the State Environment Impact Assessment Authority(SEIAA), MAHARASHTRA)

***

Date **04/05/2026**

To,

Balasaheb Sundarrao Deshmukh
JSW STEEL COATED PRODUCTS LIMITED
Plot No. A-10/1, 10/2 & A-11, MIDC Kalmeshwar, Tah. Kalmeshwar Dist. Nagpur (Maharashtra), Kalmeshwar, NAGPUR, MAHARASHTRA, MIDC Area, 441501
deshmukh.balasaheb@jsw.in

Subject: Grant of prior Environmental Clearance (EC) to the proposed project under the provision of the EIA Notification 2006 -regarding.

Sir/Madam,

This is in reference to your application submitted to SEIAA vide proposal number SIA/MH/IND1/495080/2024 dated 21/09/2024 for grant of prior Environmental Clearance (EC) to the proposed project under the provision of the EIA Notification 2006 and as amended thereof.

2. The particulars of the proposal are as below :

(i) EC Identification No.	EC24B1009MH5991489N
(ii) File No.	SIA/MH/IND1/495080/2024
(iii) Clearance Type	Fresh EC
(iv) Category	B1
(v) Project/Activity Included Schedule No.	3(a) Metallurgical Industries (ferrous and non ferrous)
(vii) Name of Project	M/s. JSW Steel Coated Products Limited. The processing unit for Colour Coated Coils & Sheets, CR Coils & Sheets, Galvanized Coils & Sheets, Galvalume Coils & Sheets, Recovered HCL, Gaseous Nitrogen, At Plot No. A-10/1, A-10/2&A-11, MIDC, Kalmeshwar, Dist. Nagpur, State: Maharashtra. Seeking EC for regularization of existing Unit as per NGT Order dtd 12.02.20&MPCB Circular no./MPCB /ID (APC) /Rolling Mill/ TB/B-041 dtd. 20.07.21
(viii) Name of Company/Organization	JSW STEEL COATED PRODUCTS LIMITED
(ix) Location of Project (District, State)	NAGPUR, MAHARASHTRA

(x) Issuing Authority	SEIAA
(xi) Applicability of General Conditions as per EIA Notification, 2006	No

Plot/Survey Khasra Nos.: at Plot No. A/10-1 A-10/2 and A-11, MIDC, Kalmeshwar, Dist. Nagpur, State: Maharashtra

3. In view of the particulars given in the Para 1 above, the project proposal interalia including Form-1(Part A, B and C)/ EIA & EMP Reports were submitted to the SEIAA for an appraisal by the SEIAA under the provision of EIA notification 2006 and its subsequent amendments.
4. The above-mentioned proposal has been considered by SEIAA in the meeting held on . The minutes of the meeting and all the project documents are available on PARIVESH portal which can be accessed from the PARIVESH portal by scanning the QR Code above or through the following web link click here.
5. The brief about configuration of products and byproducts as submitted by the Project Proponent in orm-1 (Part A, B and C)/ EIA & EMP Reports / presented during SEIAA are annexed to this EC as Annexure (1).
6. The SEIAA, in its meeting held on , based on information submitted viz: Form 1 (Part A, B and C), EIA/EMP report etc & clarifications provided by the project proponent and after detailed deliberations on all technical aspects and public hearing issues and compliance thereto furnished by the Project Proponent, recommended the proposal for grant of Environment Clearance under the provision of EIA Notification, 2006 and as amended thereof subject to compliance of Specific and Standard EC conditions as given in this letter.
7. The SEIAA has examined the proposal in accordance with the provisions contained in the Environment Impact Assessment (EIA) Notification, 2006 & further amendments thereto and based on the recommendations of the State Environment Impact AssessmentAuthority(SEIAA) Appraisal Committee hereby accords Environment Clearance to the instant proposal of M/s. Balasaheb Sundarrao Deshmukh under the provisions of EIA Notification, 2006 and as amended thereof subject to compliance of the Specific and Standard EC conditions as given in Annexure (1)
8. The Ministry reserves the right to stipulate additional conditions, if found necessary.
9. The Environmental Clearance to the aforementioned project is under provisions of EIA Notification, 2006. It does not tantamount to approvals/consent/permissions etc. required to be obtained under any other Act/Rule/regulation. The Project Proponent is under obligation to obtain approvals /clearances under any other Acts/ Regulations or Statutes, as applicable, to the project.
10. The Project Proponent is under obligation to implement commitments made in the Environment Management Plan, which forms part of this EC.
11. General Instructions:

(a) The project proponent shall prominently advertise it at least in two local newspapers of the District or State, of which one shall be in the vernacular language within seven days indicating that the project has been accorded environment clearance and the details of MoEF&CC/SEIAA website where it is displayed.
(b) The copies of the environmental clearance shall be submitted by the project proponents to the Heads of local bodies, Panchayats and Municipal Bodies in addition to the relevant offices of the Government who in turn has to display the same for 30 days from the date of receipt.
(c) The project proponent shall have a well laid down environmental policy duly approved by the Board of Directors (in case of Company) or competent authority, duly prescribing standard operating procedures to have proper checks and balances and to bring into focus any infringements/deviation/violation of the environmental / forest / wildlife norms / conditions.
(d) Action plan for implementing EMP and environmental conditions along with responsibility matrix of the project proponent (during construction phase) and authorized entity mandated with compliance of conditions (during perational phase) shall be prepared. The year wise funds earmarked for environmental protection measures shall be kept in separate account and not to be diverted for any other purpose. Six monthly progress of implementation of action plan shall be reported to the Ministry/Regional Office along with the Six-Monthly Compliance Report.
(e) Concealing factual data or submission of false/fabricated data may result in revocation of this environmental clearance and attract action under the provisions of Environment (Protection) Act, 1986.
(f) The Regional Office of this Ministry shall monitor compliance of the stipulated conditions. The project authorities should extend full cooperation to the officer (s) of the Regional Office by furnishing the requisite data /

information/monitoring reports.

(g) Any appeal against this EC shall lie with the National Green Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010.

12. This issues with the approval of the Competent Authority

Annexure 1

Specific EC Conditions for (Metallurgical Industries (Ferrous And Non Ferrous))

1. Specific Conditions

S. No	EC Conditions
1.1	**Specific Conditions:** 1. PP should submit justification about applicability of EIA Notifiaction,2006 & amended thereafter time to time as they had subsequently received consent to operates from the MPCB after the applicability of EIA Notification,2006. 2. Pp to propose 33% green belt plan along the periphery of the plot. 3.PP to submit CTO compliance obtained from MPCB. 4. PP to install 24x7 continuous emission monitoring system at process stacks to monitor stack emission with respect to standards prescribed in Environment (Protection) Rules, 1986 as amended from time to time and connected to SPCB and CPCB online servers; PP to Monitor fugitive emissions in the plant premises at least once in every quarter through labs recognized under Environment (Protection) Act, 1986. 5. PP to implement CER plan in consultation with the District Authority as per OM dated: 01/05/2018 issued by MoEF & CC.

Annexure 2

Details of the Project

<table>
<tr><th>S. No.</th><th>Particulars</th><th>Details</th></tr>
<tr><td>a.</td><td>Details of the Project</td><td>M/s. JSW Steel Coated Products Limited. The processing unit for Colour Coated Coils & Sheets, CR Coils & Sheets, Galvanized Coils & Sheets, Galvalume Coils & Sheets, Recovered HCL, Gaseous Nitrogen, At Plot No. A-10/1, A-10/2&A-11, MIDC, Kalmeshwar, Dist. Nagpur, State: Maharashtra. Seeking EC for regularization of existing Unit as per NGT Order dtd 12.02.20&MPCB Circular no./MPCB /ID (APC) /Rolling Mill/ TB/B-041 dtd. 20.07.21</td></tr>
<tr><td>b.</td><td>Latitude and Longitude of the project site</td><td>21.22696329263312,78.89744464570794 21.23366155645338,78.90494119525158</td></tr>
<tr><td>c.</td><td>Land Requirement (in Ha) of the project or activity</td><td><table><tr><th>Nature of Land involved</th><th>Area in Ha</th></tr><tr><td>Non-Forest Land (A)</td><td>34.43</td></tr></table></td></tr>
</table>

S. No.	Particulars	Details
		<table><tr><th>Nature of Land involved</th><th>Area in Ha</th></tr><tr><td>Forest Land (B)</td><td>0</td></tr><tr><td>Total Land (A+B)</td><td>34.43</td></tr></table>
d.	Date of Public Consultation	Public consultation for the project was held on
e.	Rehabilitation and Resettlement (R&R) involvement	NO
f.	Project Cost (in lacs)	91745
g.	EMP Cost (in lacs)	7880
h.	Employment Details	

Details of Products & By-products

Name of the product /By-product	Product / By-product	Quantity	Unit	Mode of Transport / Transmission	Remarks (eg. CAS number)
Colour Coated Coils & Sheet, Galvanized coils & sheet, Galvalume coils & sheets & Cold rolled coils & sheets	Product	1272000	MTPA	Road	
Recovered HCl	Product	50000	MTPA	Road	
Gaseous Nitrogen	Product	10950	MTPA	Road	

STATE LEVEL ENVIRONMENT IMPACT ASSESSMENT AUTHORITY

No. **SIA/MH/IND1/495080/2024**
Environment & Climate Change Department
Room No. 217, 2nd Floor,
Mantralaya, Mumbai- 400032.

To
M/s. JSW Steel Coated Products Limited
Village Pimparkhed, Taluka Dindori, District Nashik, Maharashtra.

Subject : Environmental Clearance for M/s. JSW Steel Coated Products Limited. The processing unit for Colour Coated Coils & Sheets, CR Coils & Sheets, Galvanized Coils & Sheets, Galvalume Coils & Sheets, Recovered HCL, Gaseous Nitrogen, At Plot No. A-10/1, A-10/2&A-11, MIDC, Kalmeshwar, Dist. Nagpur, State: Maharashtra. Seeking EC for regularization of existing Unit as per NGT Order dtd 12.02.20 & MPCB Circular no./MPCB /ID (APC) /Rolling Mill/ TB/B-041 dtd. 20.07.21

Reference : Application no. SIA/MH/IND1/495080/2024

This has reference to your communication on the above-mentioned subject. The proposal was considered by the SEAC-1 in its 307th meeting under screening category B1 as per EIA Notification, 2006 and recommend to SEIAA. Proposal then considered in 329th (Part-B) meeting of State Level Environment Impact Assessment Authority (SEIAA) held on 20th April,2026.

2. Brief Information of the project submitted by you is as below:

Table A.: Description of basic Information

Project Details-

1	Location/ Town: Kalmeshwar MIDC		Located at Plot No. A/10-1 A-10/2 and A-11, MIDC, Kalmeshwar, Dist. Nagpur, State: Maharashtra	
2	Plot Area: 344344 m^2. (sq/mts)		Category:(A/B/B1/B2): B1	
3	TOR Details: ToR recommended by State Expert Appraisal Committee dated 22.09.2022 and SEIAA dated 08.11.2022. ToR Letter was issued from SEIAA dated 05.12.2022		Previous EC Details: NA	
4	Violation case:	No	CRZ NOC Requires:	No
5	Layout plan approval authority: MIDC Kalmeshwar		Approval plan details: **DB/Ngp.Dn.II/A-61425/ of 2020 dated 13.02.2020**	
6	Approved Construction area: Industrial sheds		No. of building: Main Building, Main Security, Weighing Unit Security, Canteen, Dispensary, Employee rest room, Admin Block, Stores, STP / ETP/ARP/ZLD/Lines	

7	Structural Stability Report:		No. of floors: G+1
8	Existing Green Belt area: 1,13,978 m^2 with 33 % of total plot area		No. of existing trees: 2041 Nos.
9	Proposed Green belt area with % of total plot area: already 33 % green belt provided		Nos. of proposed trees: 2270 nos.
10	Previous EC compliance report details: NA		Certified compliance inspection date: NA
11	General/Specific conditions are applicable:		No
12	Facility area: 1,24,000 m^2	-TBUA area	Parking area: 2270 m^2
13	Storage area: 37,461.32 m^2		Raw material 10700 m^2 Finished good storages: 20200 m^2

Product Details (Fill up the details)

Sr.No.	Raw Materials	Quantity per MT/ Annum	Storage area	Hazard category	Type of Storage
1	HR Coils	731910	5981	-	Dedicated Storage shed
2	CR Coils	100078	1920	-	Dedicated Storage shed
3	Zinc	13,717.00	310	-	Dedicated Storage shed
4	Aluminium Si	10554.00	350	-	Dedicated Storage shed
5	Premix Metal	600.00	120	-	Dedicated Storage shed
6	Paint	7639.00	820	Flammable	Dedicated Storage shed
7	Thinner	942.00	210	Flammable	Dedicated Storage shed

Production Details

Sr. No.	Name of Product	Existing Quantity (MTPA)	Proposed Quantity (MTPA)	Total Quantity (MTPA)	Approving authority (Name):
1	Colour Coated Coils & Sheet, Galvanized coils & sheet, Galvalume coils & sheets & Cold rolled coils & sheets	12,72,000	0	12,72,000	MPCB
2	Recovered HCl	50,000	0	50,000	MPCB
3	Gaseous Nitrogen	10,950	0	10,950	MPCB

Table No. 1. Water quantity

Water quantity		
1	Water Requirement:	**Total water requirement: 2943 m^3/d** (Fresh 2228 **m^3/d** + recycled 715 **m^3/d**)
2	Source and permission:	MIDC-Kalmeshawar, Permission available
3	Water consumption:	Total 2943 CMD

4	Effluent generation:	Effluent to ETP: 498 m^3/d, Sewage to STP: 450 m^3/d
5	Rain water harvesting details:	the estimated direct rainwater storage potential is around 1,27,440 m^3. The potential runoff from unpaved area is around 31,014 m^3 which can be harvested through recharge structure with plant premises.

Table No. 2. Water Requirement

Sr. No.	Water Usage	Requirement (m3/day)	Losses (m3/day)	Effluent Generation (m3/day)	Remark
1	Industrial Cooling + Boiler Feed	1305= (800 + 505)	1285	20	Generated effluent is treated in ZLD, ARP and CCL ETP plant. 450 m^3/day will be reused in process
2	Process	701 (251 fresh + 450 recycled)	223	478	
3	Domestic	367.50	73	294	Generated sewage is treated in Sewage Treatment Plant and treated water is used for gardening
4	Gardening	570 (305 fresh + 265 recycled)	570	0	265 m^3/day STP treated waste water will be reused.
	TOTAL	**2943 (Fresh 2228 + recycled 715)**	**2151**	**792**	

Table No. 3.

Sewage	
1	Sewage generation: 294 CMD
2	Sewage treatment and disposal: STP Provided having capacity 450 CMD

Table No. 4.

Effluent generation	
1	Quantity: 498 CMD, Effluent form process, From Domestic 294 CMD
2	High TDS/ COD Quantity: 328 (CMD)
3	Low TDS/ COD Quantity: 170 (CMD)
4	Effluent treatment Scheme (Brief information):
5	ZLD Effluent treatment (Brief information): ETP (Capacity –650 m^3/day) with Tertiary Treatment Facilities along with RO (Capacity –150 x 2 m^3/day) and MEE (Capacity – 150 m^3/day) to have ZLD install Zero liquid discharge. Also ARP of capacity 154 KL/d provided Domestic effluent treated in STP of capacity 450 CMD
6	CETP (Name & membership details): NA

7	Parameters of treated effluent :(PH/ TSS/ TDS/ COD/ BOD/ Heavy Metals/ Benzene/ etc) ETP:

S. No.	Parameters	Outlet
1	COD mg/lit	05-10
2	BOD mg/lit	02-4
3	pH	7-8.5
4	TDS ppm	150-200
6	TSS ppm	0-02

Table No. 5.

Type of Waste	Source	Unit	Consent Limit/Annum Quantity	Disposal
Coal Ash	Boiler	MT/A	5657.5	Sale to JSW Authorized Vendor
Iron Oxide	ARP	MT/A	9000	Sale to JSW Authorized Vendor
Metal Scrap	Process area	MT/A	53631	Sale to JSW Authorized Vendor
STP Sludge	Sewage	MT/A	20	Used as manure within own premises

Table No. 6. Biomedical Waste

Type of Waste	Source	Unit	Consent Limit/Annum Quantity	Disposal
Yellow	OHC	Kg/Month	6	CBMWTSDF
White	OHC	Kg/Month	1	CBMWTSDF
Blue	OHC	Kg/Month	1	CBMWTSDF

Table No. 7. Hazardous Waste Generation and Disposal Details

S. No.	Type of Waste	Source	Category of Waste	Qty.	Unit	Disposal
1	Empty barrels/ containers/ liners contaminated with hazardous chemicals / wastes	Process	33.3	60000	Nos.	Sale to authorized recycler
2	Used / Spent Oil	Process	5.1	520	KL	Sale to authorized recycler
3	Wastes / residues containing oil	Process	5.2	70	MT	CHWTSDF
4	Acidic and Alkaline Residues/sludge	Process	12.1	4024	MT	CHWTSDF
5	Process wastes residues and sludges	Process	21	358	MT	CHWTSDF
6	Other residues from processing of zinc ash or skimming	Process	6.3	1350	MT	Sale to authorized recycler

7	Spent Solvent	Process	20.2	690	MT/A	Sale to authorized party for reuse/recycler

Table. No. 8. Fuel Consumption

S. No.	Type	Qty.	For Boiler/ DG	Ash Generation	SO2 %	Air pollution control measures:
1	**HSD**	**45 lit/h**	**For DG**	**00**	**0.25**	**Stack**
2	**Propane**	**95 T/day**	**For process**	**00**	**BDL**	**Stack**

Table No. 9.

Energy	
1	Source of Power: MSEDCL
2	Demand (KVA): 24000 kWH
3	DG set (Capacity): 910kVA – 1 No., 1010kVA – 2 Nos.
4	• Renewable energy details with budget allocation: We have been planned to utilized the budget in million Rs – FY26: 4.62, FY27:71.8, FY28:642.5, FY29:199.5 and FY30: 238.5

Table No. 10. Stack details with specification

Stack No.	Source	Height in m	Fuel	Quantity
1.	Galva-1	25.00	Propane /LPG/RLNG	416.66kg/hr
2.	Galva-2	25.00	Propane /LPG/RLNG	750 kg/hr
3.	CCL 1	25.00	Propane /LPG/RLNG	208.33 kg/hr
4.	CCL 2	31.00	Propane /LPG/RLNG	250 kg/hr
5.	CPL Scrubber	25.00	--	
6.	ARP Scrubber	30.00	Propane /LPG/RLNG	83.33 kg/hr
7.	Boiler-1	35.00	Propane / RLNG	60 MT/day
8.	Boiler-2	30.00	Coal	35 MT/day
9.	DG Set 1010kVA	9.70	HSD	212.1 kg/hr
10.	DG Set 1010 kVA	9.70	HSD	210 kg/hr
11.	CCL 3 (Waste heat recovery boiler)	30.00	Propane	1.0 kg/hr
12.	Column F10	14.00	No fuel	0
13.	DG Set 910 kVA	9.00	HSD	191 kg/hr

EMP Implementation: 11

1	Total/ Capital investment: ₹ 7880.00 Lakhs	Recurring Expenditure Provisions: ₹ 604.3 lakhs/Annum
2	G.B./ Plantation (Total no. of trees): Existing 2041 Nos. Proposed 2270 nos.	Plantation Cost: ₹ 200.00 Lakhs

3	Air/ Noise/ Water Pollution mitigation cost: ₹6220 Lakhs
4	Employees Health checkup and insurance cost: ₹40 Lakhs/annum
5	Bio- Toilet facility cost: ₹ - NA
6	Safety, Security, Drinking Water & Solar light etc. cost: ₹ 1.2 Cr/ annum.

CER Implementation: 12

Proposed CER Activities are as below

Sr. No.	CER Activities	Proposed Expenditure in Rs. Cr.					
		FY 24-25	FY 25-26	FY 26-27	FY 27-28	FY 28-29	FY 29-30
1	Environment Management	0.1	0.1	0.10	0.15	0.20	0.20
2	Water Harvesting	0.20	00	0.5	0.8	1.0	0.8
3	Sports	0.3	0.4	0.2	0.6	0.5	0.6
4	Plantation in community areas	0.10	0.1	0.1	0.1	0.1	0.1
5	Sanitation	00	00	00	00	00	00
6	Health & Nutrition	00	0.1	00	00	00	00
7	Education	0.7	0.7	0.80	0.5	0.5	0.5
8	Skill development	00	0.3	00	00	00	00
9	Community Development	0.2	0.5	0.40	0.20	00	0.0
10	Agri-livelihood	00	0.03	00	00	00	00
11	Cross drains	00	00	00	00	00	00
12	Electrification (Including Solar power)	00	00	00	00	00	00
13	Solid waste management facilities	00	00	00		00	00
14	Infrastructure creation for drinking water supply	0.14	00	00	00	00	00
	Total	1.7	2.2	2.1	2.3	2.1	2.2

3. Proposal was considered by SEIAA in its 329th (Part-B) meeting held on 20th April,2026 and decided to accord Environment Clearance to the said project under the provisions of Environment Impact Assessment Notification, 2006 subject to implantation of following terms and conditions-

Specific Conditions:

SEAC Conditions-

1. PP should submit justification about applicability of EIA Notifiaction,2006 & amended thereafter time to time as they had subsequently received consent to operates from the MPCB after the applicability of EIA Notification,2006.
2. Pp to propose 33% green belt plan along the periphery of the plot.
3. 3.PP to submit CTO compliance obtained from MPCB.
4. PP to install 24x7 continuous emission monitoring system at process stacks to monitor stack emission with respect to standards prescribed in Environment (Protection) Rules, 1986 as amended from time to time and connected to SPCB and CPCB online servers; PP to Monitor fugitive emissions in the plant premises at least once in every quarter through labs recognized under Environment (Protection) Act, 1986.
5. PP to implement CER plan in consultation with the District Authority as per OM dated: 01/05/2018 issued by MoEF & CC.

SEIAA Conditions

1. PP had obtained approval from MIDC Kalmeshwar dated 13.02.2020 and as per the plan their total plot area of the project is 344344 m2 and they have proposed green belt of 1,13,978 m2 i.e. 33% of total plot area. ADTP to ensure the compliance of the same.
2. PP to undertake Miyawaki plantation of native and indigenous trees such as Banyan, Peeple, Neem, Jamun and other suitable trees as per the Forest Department, Govt. of Maharashtra circular no SaVaVi-2019/C.R.3/F-11, dated 25th June, 2019. The said plantation to be completed in the first year of operation of Environmental Clearance under expert guidance of Miyawaki experts / arborist.
3. PP to strictly observe the Solid Waste Management Rules, 2016 as amended time to time.
4. PP to strictly observe the Hazardous and Other Wastes (Management & Trans boundary Movement) Rules, 2016 as amended time to time.
5. PP to identify all sources of fugitive air pollution on site and provide pollution control measures to mitigate pollution and meet the standard parameters stipulated in the Environment (Protection) Rules, 1986 amended time to time & Air (Prevention and Control of Pollution) Act, 1981 amended time to time.
6. PP to ensure storage of chemicals as per the Manufacture, Storage and Import of Hazardous Chemicals Rules, 1989 amended time to time to ensure no release of any chemical to the atmosphere and leakage to the soil.
7. PP to ensure transport, storage, handling and use of the flammable/toxic chemicals as per conditions stipulated in license/approval of the Petroleum & Explosive Safety Organization (PESO).
8. PP to obtain approval and License from the Directorate of Industrial Health & Safety (DIHS) for proposed project and implement all condition stipulated therein. PP to carry out Safety Audit as stipulated in the Maharashtra Factories Rules, 1963 and ensure compliance of

recommendation of the Audit.

9. PP to provide solar energy for illumination of Administrative Building, Street Lights and parking Area.
10. PP to ensure use of briquette /bio coal/ pellets/ or any such suitable product derived from scientific processing of appropriate stream of dry waste/agricultural waste, not less than 50 % of the total fuel requirement to the boiler.
11. PP to provide roof top Rain Water Harvesting facility.
12. PP to ensure that Project is a ZLD for unit.

General Conditions:

I. The project proponent shall advertise at least in two local newspapers widely circulated in the region around the project, one of which shall be in the Marathi language of the local concerned within seven days of issue of this letter, informing that the project has been accorded Environmental Clearance and copies of Environmental Clearance letter are available with the Maharashtra Pollution Control Board, website of the company and may also be seen at Website at http://parivesh.nic.in.

II. The project Proponent shall upload the status of compliance (soft copies) of the conditions stipulated Environmental Clearance letter including monitoring data of air, water, soil, noise etc. on their website and shall update the same periodically. The half yearly compliance report shall simultaneously be submitted to the Maharashtra Pollution Controls Board, SEIAA and the Regional Office off MoEF&CC at Nagpur, on 1st June & 1sr December of each calendar year.

III. Separate fund shall be allocated for the implementation of Environmental Management Plan along with item wise break up and specific time line for its completion. The cost shall be included as part of the project cost. The funds earmarked for the environmental protection measures shall not be diverted for other purpose and year-wise expenditure should be reported to the MPCB and the SEIAA.

IV. A separate Environmental Management Cell with qualified personnel shall be set up for implementation of the stipulated environmental safeguards.

V. In the event of failure of any pollution control equipment, the manufacturing activity shall be immediately stopped safely till the effective functioning of pollution control equipment's is regained.

VI. PP to strictly follow conditions stipulated in the Consent to Establish/Operate issued by the Maharashtra Pollution Control Board.

VII. PP to provide separate drains for storm water and effluent, and ensure that, the storm water drains are dry all the time and in no case the effluent shall mix with the storm water drain.

VIII. Periodic Monitoring of ground water in the study area as marked in the Environmental Impact Assessment Report shall be undertaken and results analysed to ascertain any change in the quality of water. Results shall be regularly submitted to the Maharashtra Pollution Control Board.

IX. The overall noise levels in and around the factory premises shall be kept within the prescribed standard under the Environment (Protection) Act, 1986 and Rule, 1989 as amended from time to time by providing adequate noise control measures and protective equipment's like ear muff and ear plug etc.

X. Adequate safety measures shall be ensured to limit the risk zone within the factory premises. Leak detection system shall be installed for early detection and mitigation purpose.

XI. PP to scrupulously follow the requirements of Maharashtra Factories Act, 1948 & Rules

1963 as amended from time to time.

XII. The Environmental Statement for each financial year ending on 31st March in Form-V as is mandated to be submitted by the Project Proponent to the concerned Pollution Control Board as prescribed under the Environment (Protection) Rule, 1989 as amended from time to time, it shall also be put on the website of the company along with the status of the compliance of the conditions stipulated in the Environmental Clearance leatter.

4. The environmental clearance is being issued without prejudice to the action initiated under EP Act or any court case pending in the court of law and it does not mean that project proponent has not violated any environmental laws in the past and whatever decision under EP Act or of the Hon'ble court will be binding on the project proponent. Hence this clearance does not give immunity to the project proponent in the case filed against him, if any or action initiated under EP Act.
5. In case of submission of false document and non-compliance of stipulated conditions, Authority/ Environment Department will revoke or suspend the Environment clearance without any intimation and initiate appropriate legal action under Environmental Protection Act, 1986.The Environment department reserves the right to add any stringent condition or to revoke the clearance if conditions stipulated are not implemented to the satisfaction of the department or for that matter, for any other administrative reason.
6. Validity of Environment Clearance: The environmental clearance accorded shall be valid as per EIA Notification, 2006, amended time to time.
7. In case of any deviation or alteration in the project proposed from those submitted to this department for clearance, a fresh reference should be made to the department to assess the adequacy of the condition(s) imposed and to incorporate additional environmental protection measures required, if any.
8. The above stipulations would be enforced among others under the Water (Prevention and Control of Pollution) Act, 1974, the Air (Prevention and Control of Pollution) Act, 1981, the Environment (Protection) Act, 1986 and rules there under, Hazardous Wastes (Management and Handling) Rules, 1989 and its amendments, the public Liability Insurance Act, 1991 and its amendments.
9. Any appeal against this Environment clearance shall lie with the National Green Tribunal (Western Zone Bench, Pune), New Administrative Building, 1st Floor, D-Wing, Opposite Council Hall, Pune, if preferred, within 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010.

Jayashree Bhoj (IAS)
(Member Secretary, SEIAA)

Copy to:

1. Chairman, SEIAA (Maharashtra), Mumbai.
2. Secretary, MoEF & CC
3. IA- Division MOEF & CC
4. Member Secretary, Maharashtra Pollution Control Board, Mumbai.
5. Regional Office MoEF & CC, Nagpur
6. District Collector, Nagpur.
7. Regional Officer, Maharashtra Pollution Control Board, Nagpur.

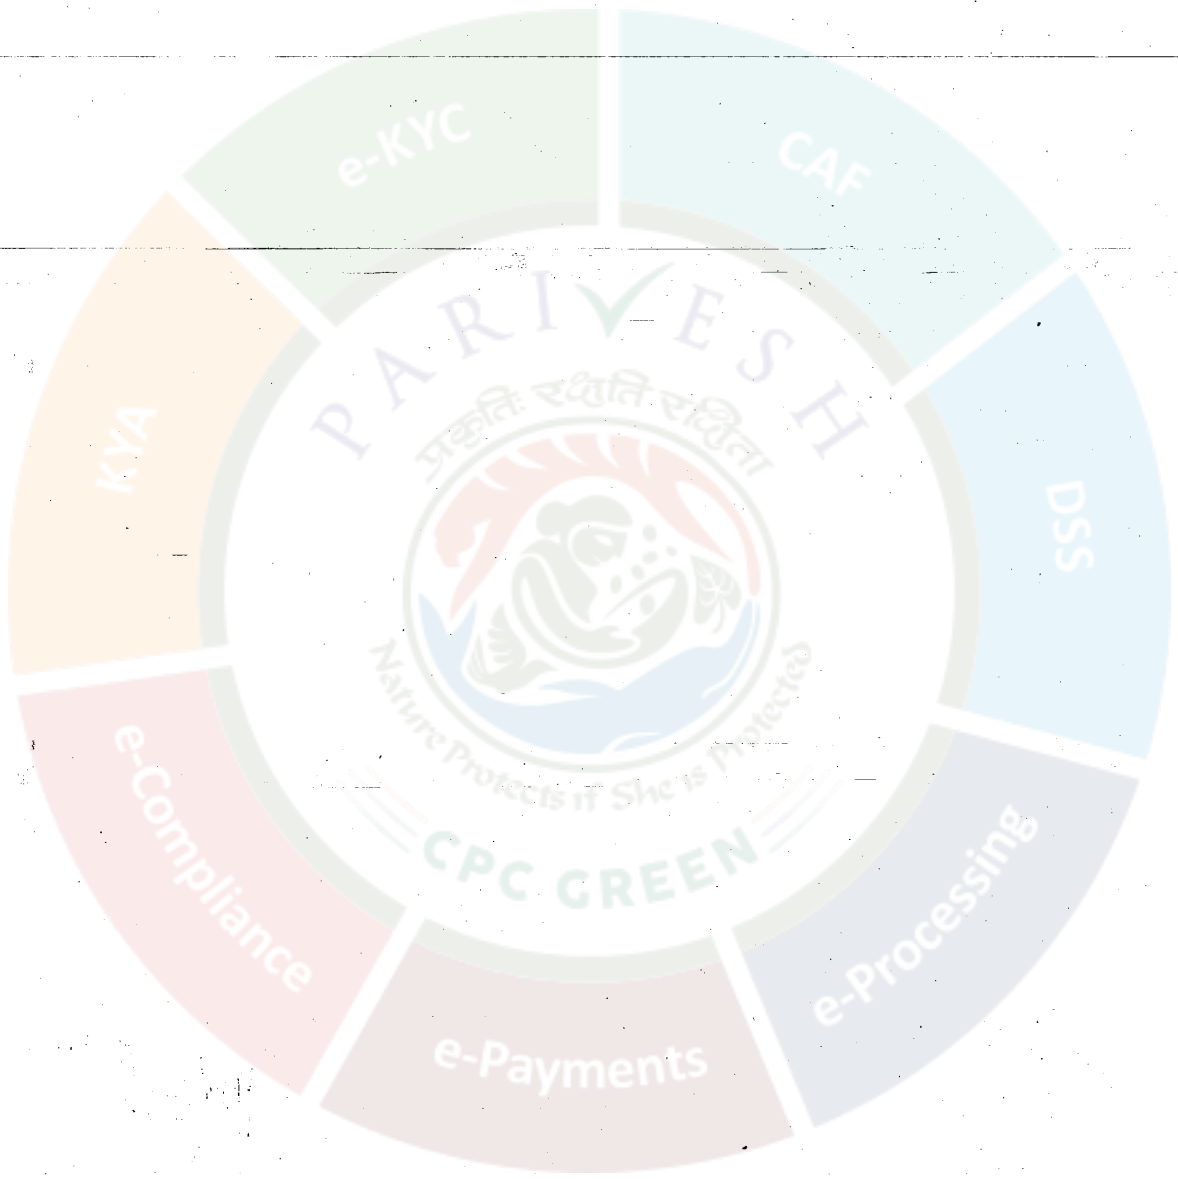

Signed by
Jayashree Shrikant Bhoj
Date: 05-05-2026 10:30:25
Reason: Verified and signed